

Product Classification		NS AQUATREAD	NSHR AQUATREAD HIGHER SLIP RESISTANCE
Type of flooring	EN ISO 10581	2mm Heterogeneous sheet	2mm Heterogeneous sheet
Type of flooring cover	EN ISO 10581	Slip-resistant, antibacterial, heat-resistant vinyl sheet	Slip-resistant, antibacterial, heat-resistant vinyl sheet
Applications		Commercial, Medical, Healthcare, Education, Industrial, Kitchens	Commercial, Medical, Healthcare, Education, Industrial, Kitchens
Product identification	EN ISO 10581.4.1	Type I	
Commercial classification	ISO 10874	34 (Very Heavy)	34 (Very Heavy)
Industrial classification	ISO 10874	43 (Heavy)	43 (Heavy)
Physical Properties			
Manufactured in		Japan	Japan
Roll width	ISO 24341	1820mm	1820mm
Roll length	ISO 24341	20m	20m
Coverage		36.4sqm	36.4sqm
Overall thickness	ISO 24346	2.0mm	2.0mm
Roll weight	ISO 23997	100kg/ roll	100kg/ roll
Surface texture		Embossed	Embossed
Polyurethane reinforced		Yes	Yes + Aluminium Oxide
Warranty		15 Years	15 Years
Fire & Slip Performance			
Wet Pendulum Slip Resistance test	AS 4586:2013	P3	P4
Oil-wet inclining platform slip resistance test	AS 4586:2013	R10	R10
AS ISO 9239.1-2003		CHF: 9.5kW/m2 Smoke Value: 156%	
AS/NZS 3837-1998		Group no.3	Group no.3
Technical Performance			
Residual indentation	ISO 24343-1		
Colour fastness	ISO 105-B02 (Method 3a)		
Slip resistance	JIS A 1454 (Oy-Pull Method)	Dry: 0.84 Wet and dusty: 0.55	Dry: 0.89 Wet and dusty: 0.56
Antibacterial/ Antifungal Performance	JIS Z2801	Antibacterial Active Value >2.0	Antibacterial Active Value >2.0
Chemical resistance		Good resistance	Good resistance
Flexibility	ISO 24344, Method A		
Antistatic Property	ISO 24344, Method A	Surface resistivity (Ω): 1.0×10 ¹⁰ Volume resistivity (Ω): 1.0×10 ¹⁰ Static Charge to person (kV): >3.0 Evaluation: C	Surface resistivity (Ω): 1.0×10 ¹⁰ Volume resistivity (Ω): 1.0×10 ¹⁰ Static Charge to person (kV): >3.0 Evaluation: C
Durability Against Rolling Load	JIS A 1454 Caster Rolling Test		
Water resistance	EN 660-2		
Abrasion Resistance	JIS A 1454	Evaluation: B	Evaluation: B
Castor chair suitability	ISO 4918	Suitable	Suitable
Seam strength	ISO 16906		

NS AQUATREAD

SLIP-RESISTANT | ANTIBACTERIAL | HEAT-RESISTANT VINYL SHEET

Installation

Welding

Seams should be heat-welded or finished with a seam sealing bond. Antibacterial finish welding rod.

Adhesives

To AS 1884 Floor coverings and Aquatread Flooring Installation Instructions.

NS AQUATREAD




NS4405



NS4414




NS4415

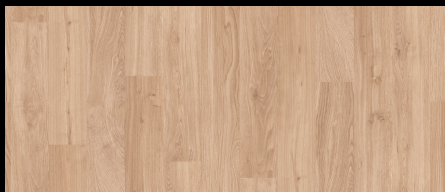

NS4423



NS4407

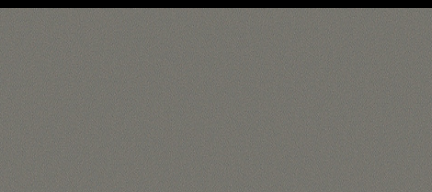

NS4408

NSHR AQUATREAD HIGHER SLIP RESISTANCE



NS4407HR (HARDER SURFACE)



NS4408HR (HARDER SURFACE)

In stock and available for immediate shipment within Australia, contact us today

SA/NT/WA: Catherine Kent catherine.kent@nolans.com.au 0448 274 696

QLD/NSW/ACT: Pas Daskalakis pas.daskalakis@nolans.com.au 0499 993 856

VIC/TAS: Colin Tsolakis Colin.Tsolakis@nolans.com.au 0403 136 320